



AMT-A0181 0.4 GHz to 6 GHz Broadband Low Noise Amplifier with EMI shielding

Data Sheet

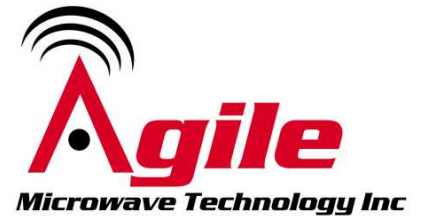

Features

- 0.4 GHz to 6 GHz Frequency Range
- Gain 30 dB typ
- Gain Flatness $\pm 0.5\text{ dB typ } \pm 1.2\text{ dB max}$
- Typical Noise Figure <math>< 1.3\text{ dB } 1.8\text{ dB max}</math>
- +14 dBm P1dB Typical, +10 dBm min
- Internally Regulated
- High EMI performance
DC to RF leakage -90 dBc typ -70 dBc max
- Operates from a Single +12V to +15V Supply
- Unconditionally Stable
- State-of-the-Art GaAs Technology

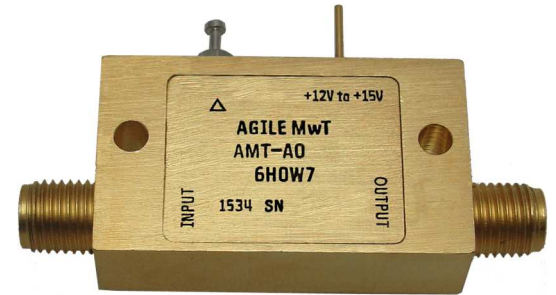

Description

The AMT-A0181 is a Broadband Low Noise amplifier with low EMI leakage over the full frequency range. The performance is achieved through the use of AMTI's proprietary technology. The amplifier I/Os are Internally matched to 50 Ohms. The AMT-A0181 is ideal for use in communication system, or where amplification is required without adding excessive noise in a Hi-Rel communications system for Com-

Applications

- Communication systems
- Microwave Radio systems
- Test Equipment
- Point to Point Radios

MAXIMUM RATINGS¹

Do NOT apply DC to RF Input

Parameter	Symbol	Units	MIN	MAX
Operating Temperature – Case	T_{MO}	° C	-40	+85
Storage Temperature - Case	T_{MS}	° C	-54	+95
RF Input power (CW)	P_{in}	dBm		+12
Die $T_{Junction}$	T_J	° C		+150
Positive Supply Voltage	V_{+SS}	V		+16

1.Stresses above those listed under "Absolute Maximum Rating" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL SPECIFICATIONS @ 23°C

Parameter	Conditions	Units	MIN	Typical	MAX
Frequency Range		GHz	0.4		6
Gain	Small Signal	dB	28	30	32
Gain Flatness		dB		±0.5	±1.2
Input Power	CW, without damage	dBm	+12		
Output Power (P1dB)	1 dB compression point @ 4 GHz	dBm	10	14	
Noise Figure	Above 500 MHz	dB		1.3	1.8
RF Input Impedance	Reference to 50 ohms VSWR			1.8:1	2.2:1
RF Output Impedance	Reference to 50 ohms			1:8:1	2.3:1
EMI Leakage	DC supply pin to RFout	dBc	-70	-90	
Supply Voltage Positive:		V		+15	
Supply Current Positive:		mA		107	190

Notes:

1/ Unconditional Stability


Measured NF has standard (Agilent/HP equipment) uncertainty of 0.15 dB

High EMI shielding

Customized configurations of the above specifications are available

Typical S-Parameters @ 25C

CH1 LOG 10 dB/ REF 0 dB
S11 5: -11.538 dB 6.000 000 000 GHz

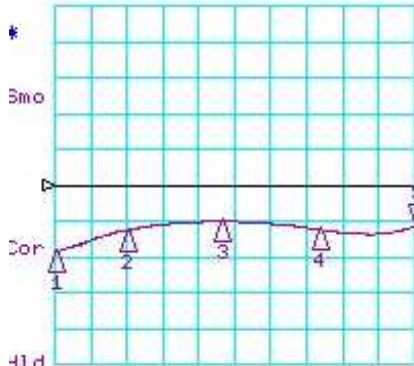


CH1 Markers

- 1: -18.751 dB
400.000 MHz
- 2: -12.615 dB
1.50000 GHz
- 3: -10.002 dB
3.00000 GHz
- 4: -12.261 dB
4.50000 GHz
- 5: -11.538 dB
6.00000 GHz

START 400.000 MHz STOP 6000.000 MHz

CH3 LOG 10 dB/ REF 0 dB
S12 5: -47.854 dB 6.000 000 000 GHz

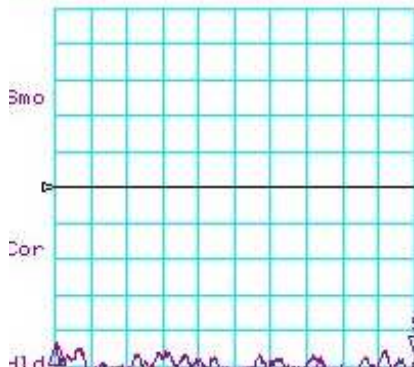


CH3 Markers

- 1: -44.076 dB
400.000 MHz
- 2: -52.064 dB
1.50000 GHz
- 3: -51.151 dB
3.00000 GHz
- 4: -47.637 dB
4.50000 GHz
- 5: -47.854 dB
6.00000 GHz

START 400.000 MHz STOP 6000.000 MHz

CH2 LOG 10 dB/ REF 28 dB
S21 5: 30.024 dB 6.000 000 000 GHz

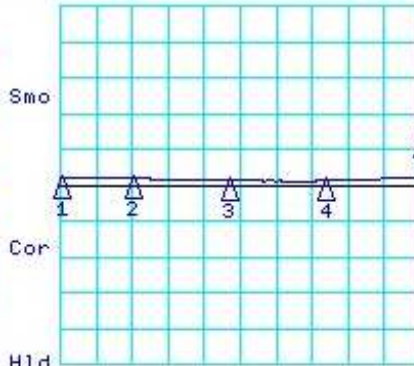


CH2 Markers

- 1: 29.870 dB
400.000 MHz
- 2: 29.992 dB
1.50000 GHz
- 3: 29.369 dB
3.00000 GHz
- 4: 29.296 dB
4.50000 GHz
- 5: 30.024 dB
6.00000 GHz

START 400.000 MHz STOP 6000.000 MHz



CH4 LOG 10 dB/ REF 0 dB
S22 5: -12.542 dB 6.000 000 000 GHz

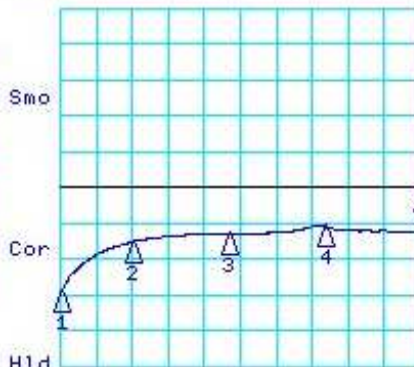


CH4 Markers

- 1: -29.202 dB
400.000 MHz
- 2: -15.239 dB
1.50000 GHz
- 3: -13.071 dB
3.00000 GHz
- 4: -10.869 dB
4.50000 GHz
- 5: -12.542 dB
6.00000 GHz

START 400.000 MHz STOP 6000.000 MHz

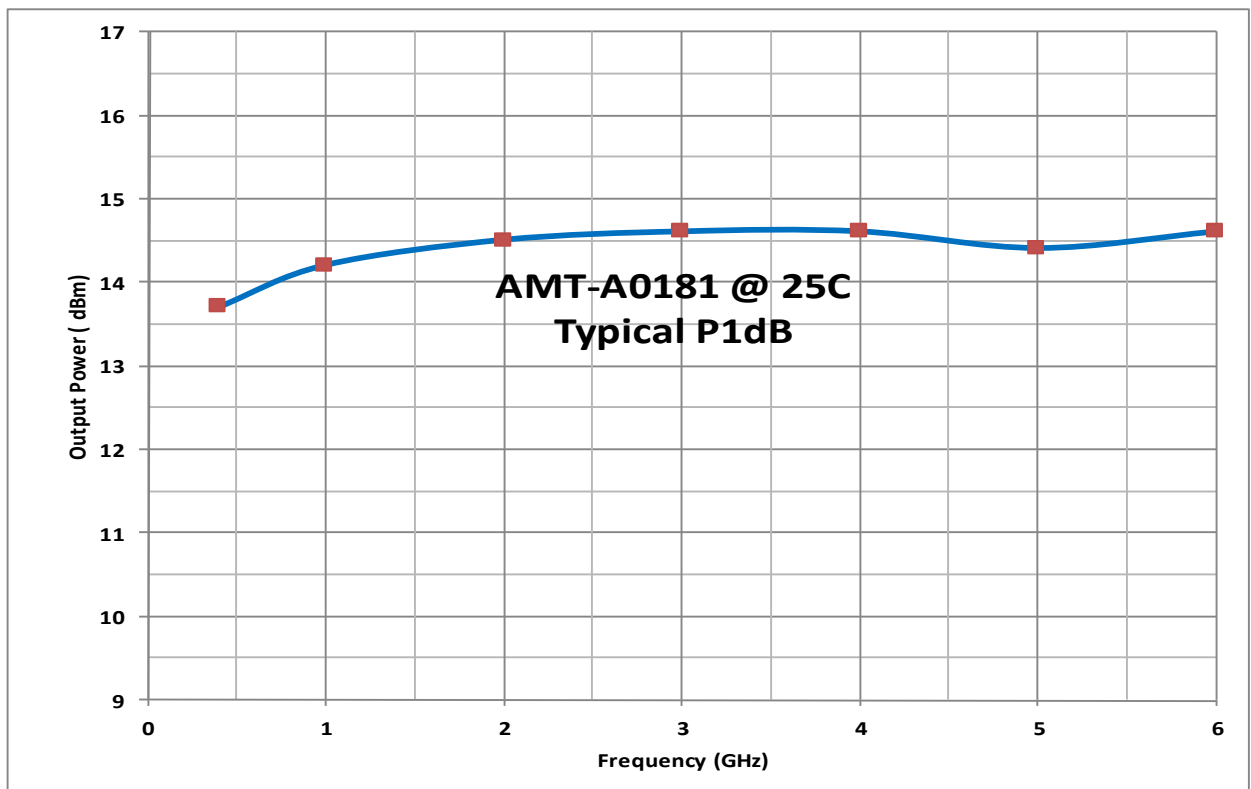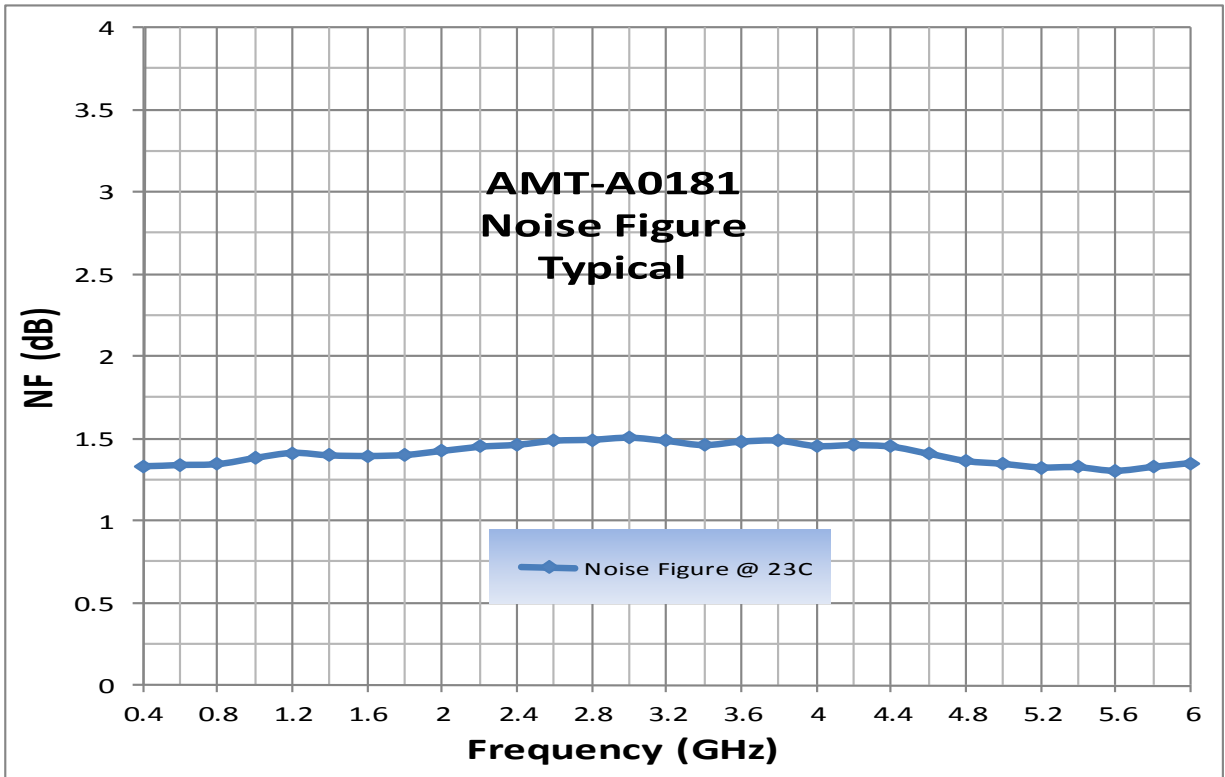

Package Outline: SMA-F Connectorized mm [Inches]

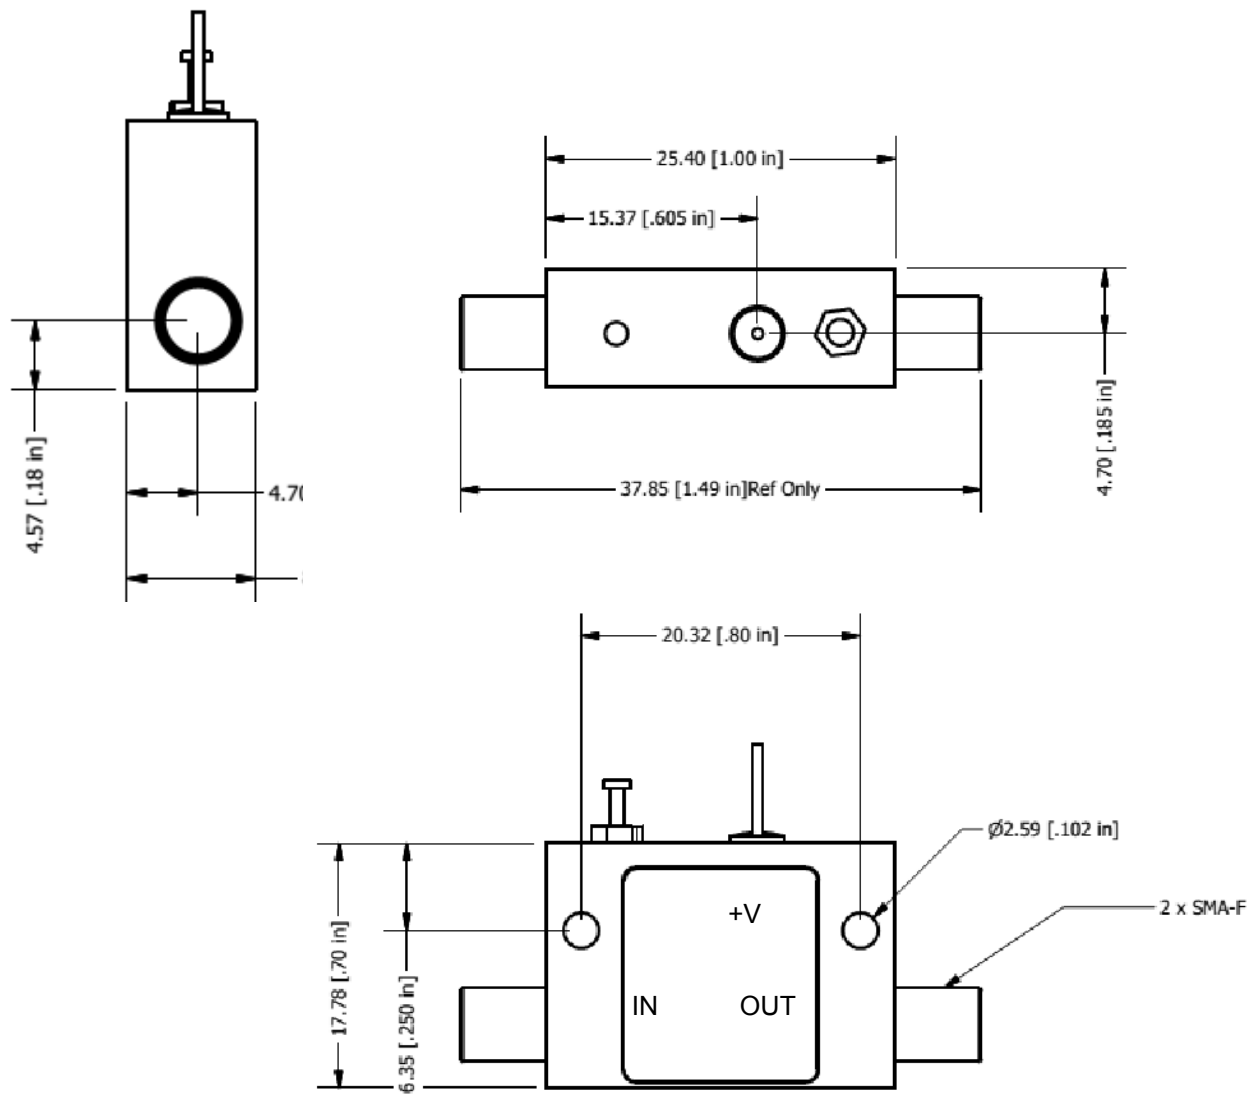

Housing: Aluminum Gold over Nickel plated
Removable SMA and Ground Slug

Model Number	Description	Hermeticity	Package
AMT-A0181	SMA Female Non-removable	Non-Hermetic	Outline: M101

Contact us for custom configurations and special requirements.

Our highly experienced team of engineers can quickly identify and implement innovative solutions using latest technology to improve performance and reduce cost.


- Add additional functionality: Input limiter, Temperature compensation, Amplitude/Phase matching, Amplitude/Phase Tracking, Automatic Gain control, Gain sloping, Bypass path, Specific supply voltage, Regulation, Power detector, Health status, and others
- Integrated: Filters, Switches, Limiter, Digital attenuator, Phase shifter, Microcontroller, Multiple amplifiers, Switch matrix, Comb generators and others
- Mechanical: Custom packages - Surface Mount, Connectorized, Waveguide, Carrier, Drop-in, Hermetic and others

Agile Microwave Technology Inc is the logical choice for all your commercial or military RF/Microwave components/module requirements.

Contact Information:

**701 Cascade Pointe Lane
Cary, NC 27513**

**ISO 9001:2015
Certified Company**

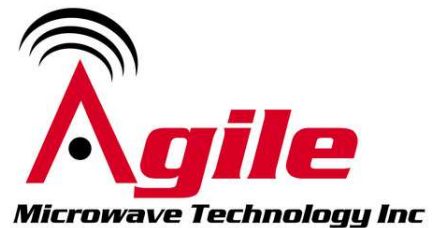

Phone: (984) 228-8001

info@agilemwt.com

www.agilemwt.com

AMTI reserves the right to change at any time without notice the design, specifications, function/form or availability of its products described herein. The buyer/customer has the responsibility to validate the performance for their applications. No liability is assumed as result of use of this information or product and no patent licenses are implied. AMTI reserves all rights. The housings may have some visible scratches , stains and epoxy resin .