

AMT-A0263 6 GHz to 18 GHz Broadband Medium Power +24 dBm P1dB



Data Sheet

Features

- 6 GHz to 18 GHz Frequency Range
- Gain 29 dB Typical
- Gain Flatness ± 1.2 dB Typical
- 4.5 dB Typical Noise Figure
- Typical P1dB power > +24dBm
- Internally Regulated
- Operates from Single +12V or +15V Supply
- Unconditionally Stable

Description

The AMT-A0263 is a Broadband Medium Power amplifier with P1dB of +24 dBm typical. The performance is achieved through the use of AMTI's proprietary matching technology and latest in GaAs technology. The amplifier I/Os are Internally matched to 50 Ohms and DC Blocked. The AMT-A0263 is ideal for use as Medium Power amplifier for test equipment, Communication systems or where broadband amplification and power are required without adding significant noise in a Hi-Rel communications system for Commercial or Military applications

Applications

- Test Equipment
- Communication Systems
- EW Systems
- Lab Applications
- Radar

MAXIMUM RATINGS¹

EAR99 NLR

Parameter	Symbol	Units	MIN	MAX
Operating Temperature – Case	T _{MO}	° C	-40	+85
Storage Temperature - Case	T _{MS}	° C	-40	+125
RF Input power (CW)	P _{in}	dBm		+20
Die T _{Junction}	T _J	° C		+150
Positive Supply Voltage	V _{+SS}	V		+15

Appropriate Heat sink must be used,

1.Stresses above those listed under "Absolute Maximum Rating" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL SPECIFICATIONS @ 23°C

Parameter	Conditions	Units	MIN	Typical	MAX
Frequency Range		GHz	6		18
Gain	Small Signal	dB	27	29	31
Gain Flatness		dB		±1.2	±2
Input Power Survival (CW)	CW	dBm	+20		
Noise Figure	6 to 18 GH	dB		4.5	7
Output Power (P1dB)	6 to 18 GHz, measured @14 GHz	dBm	+23	+24	
OIP3	OPI3 @ 14 GHz Two tone F1-F2= 10MHz	dB		30	
RF Input Impedance	Reference to 50 ohms VSWR			1.8:1	2.0:1
RF Output Impedance	Reference to 50 ohms VSWR			1.8:1	2.0:1
Supply Voltage Positive:		V		+12	
Supply Current Positive:	Small signal	mA		300	600


Notes:

1/ Unconditional Stability

Customized configurations of the above specifications are available

Typical Performance @ 23C


CH1 LOG 10 dB/ REF 0 dB
S11 2: -16.710 dB 9.000 000 000 GHz

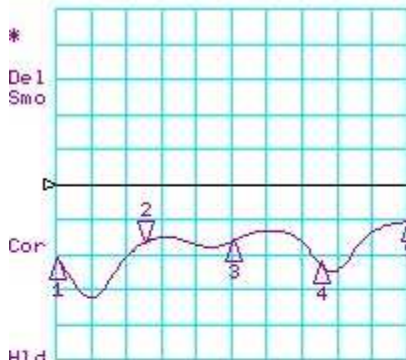

CH1 Markers
1: -21.123 dB
6.00000 GHz
3: -16.295 dB
12.0000 GHz
4: -22.696 dB
15.0000 GHz
5: -10.701 dB
18.0000 GHz

H1d
START 6000.000 MHz STOP 18000.000 MHz


CH3 LOG 10 dB/ REF -10 dB
S12 2: -58.798 dB 9.000 000 000 GHz

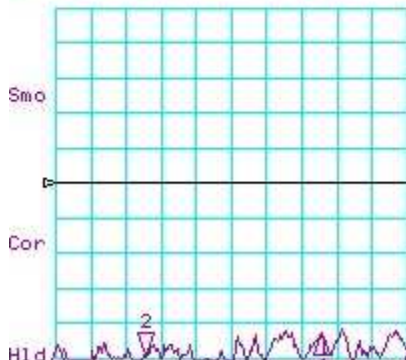

CH3 Markers
1: -56.421 dB
6.00000 GHz
3: -62.490 dB
12.0000 GHz
4: -53.399 dB
15.0000 GHz
5: -58.048 dB
18.0000 GHz

H1d
START 6000.000 MHz STOP 18000.000 MHz


CH2 LOG 10 dB/ REF 0 dB
S21 2: 29.236 dB 9.000 000 000 GHz

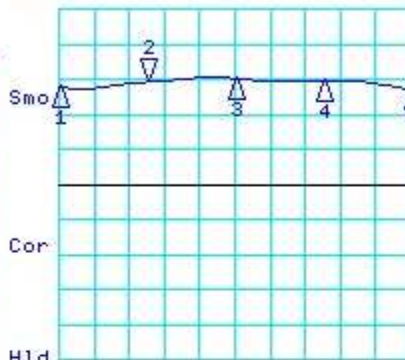

CH2 Markers
1: 27.798 dB
6.00000 GHz
3: 30.250 dB
12.0000 GHz
4: 29.637 dB
15.0000 GHz
5: 27.244 dB
18.0000 GHz

H1d
START 6000.000 MHz STOP 18000.000 MHz

CH4 LOG 10 dB/ REF 0 dB
S22 2: -18.283 dB 9.000 000 000 GHz

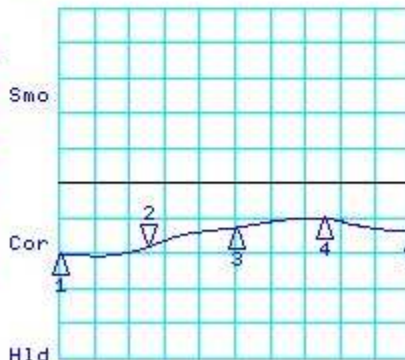

CH4 Markers
1: -20.448 dB
6.00000 GHz
3: -12.770 dB
12.0000 GHz
4: -9.8590 dB
15.0000 GHz
5: -13.489 dB
18.0000 GHz

H1d
START 6000.000 MHz STOP 18000.000 MHz

Package Outline : SMA Connectorized (inches)

Field replaceable SMA Connectors, Removable Ground slug

Note: The unit must be attached to proper heat sink

Model Number	Description	Hermeticity	Package
AMT-A0263	SMA Female	Non-Hermetic	Outline: M169

Contact us for custom configurations and special requirements.

Our highly experienced team of engineers can quickly identify and implement innovative solutions using latest technology to improve performance and reduce cost.

- Add additional functionality: Input limiter, Temperature compensation, Amplitude/Phase matching, Amplitude/Phase Tracking, Automatic Gain control, Gain sloping, Bypass path, Specific supply voltage, Regulation, Power detector, Health status, and others
- Integrated: Filters, Switches, Limiter, Digital attenuator, Phase shifter, Microcontroller, Multiple amplifiers, Switch matrix, Comb generators and others
- Mechanical: Custom packages - Surface Mount, Connectorized, Waveguide, Carrier, Drop-in, Hermetic and others

Agile Microwave Technology Inc is the logical choice for all your commercial or military RF/Microwave components/module requirements.

Contact Information:

**701 Cascade Pointe Lane
Cary, NC 27513**

**ISO 9001:2015
Certified Company**



Phone: (984) 228-8001

info@agilemwt.com

www.agilemwt.com

AMTI reserves the right to change at any time without notice the design, specifications, function/form or availability of its products described herein. The buyer/customer has the responsibility to validate the performance for their applications. No liability is assumed as result of use of this product and no patent licenses are implied. AMTI reserves all rights .