

AMT-A0485 6 GHz to 18 GHz LNA with Temperature Compensation

Data Sheet



Features

- 6 GHz to 18 GHz Frequency Range
- Gain 28 dB minimum 32 dB Typical
- Gain Flatness ± 0.6 dB Typical
- Gain Temperature Coefficient < 0.01 dB/ $^{\circ}$ C
- 2 dB Typical Noise Figure 3 dB max
- Typical P1dB power $> +18$ dBm $+15$ dBm min
- Internally Regulated
- Operates from Single $+12$ V Supply
- Unconditionally Stable



Description

The AMT-A0485 is a Low Noise Amplifier with Integrated Temp Comp. The performance is achieved through the use of AMTI's proprietary matching technology and latest in GaAs technology. The amplifier I/Os are Internally matched to 50 Ohms and DC Blocked. The AMT-A0485 is ideal for use as for test equipment, Communication systems or where broadband amplification without adding significant noise in a Hi-Rel communications system for Commercial or Military applications

Applications

- Test Equipment
- LNA for Receiver
- EW Systems
- Lab Applications
- Radar

MAXIMUM RATINGS¹

EAR99 NLR

Parameter	Symbol	Units	MIN	MAX
Operating Temperature – Case	T_{MO}	$^{\circ}$ C	-40	+85
Storage Temperature - Case	T_{MS}	$^{\circ}$ C	-40	+125
RF Input power (CW)	P_{in}	dBm		+10
Die $T_{Junction}$	T_J	$^{\circ}$ C		+150
Positive Supply Voltage	V_{+SS}	V		+15

Appropriate Heat sink must be used

1.Stresses above those listed under "Absolute Maximum Rating" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL SPECIFICATIONS @ 23°C

Parameter	Conditions	Units	MIN	Typical	MAX
Frequency Range		GHz	6		18
Gain	Small Signal	dB	28	32	
Gain Flatness		dB		±0.6	±1.2
RF Input Power	Input Power CW	dBm			+10
Noise Figure		dB		2	3
Output Power (P1dB)	measured @12GHz	dBm	+15	+18	
OIP3	OPI3 @ 12 GHz Two tone F1-F2= 10MHz	dB		25	
RF Input Impedance	Reference to 50 ohms VSWR			1.8:1	2.2:1
RF Output Impedance	Reference to 50 ohms VSWR			1.8:1	2.0:1
Supply Voltage Positive:		V		+12	
Supply Current Positive:	Small signal	mA		170	220


Notes:

1/ Unconditional Stability

- **Gain Temperature Coefficient < 0.01 dB/°C (0 to +50°C)**

Customized configurations of the above specifications are available

Package Outline M020: SMA Connectorized mm(inches)

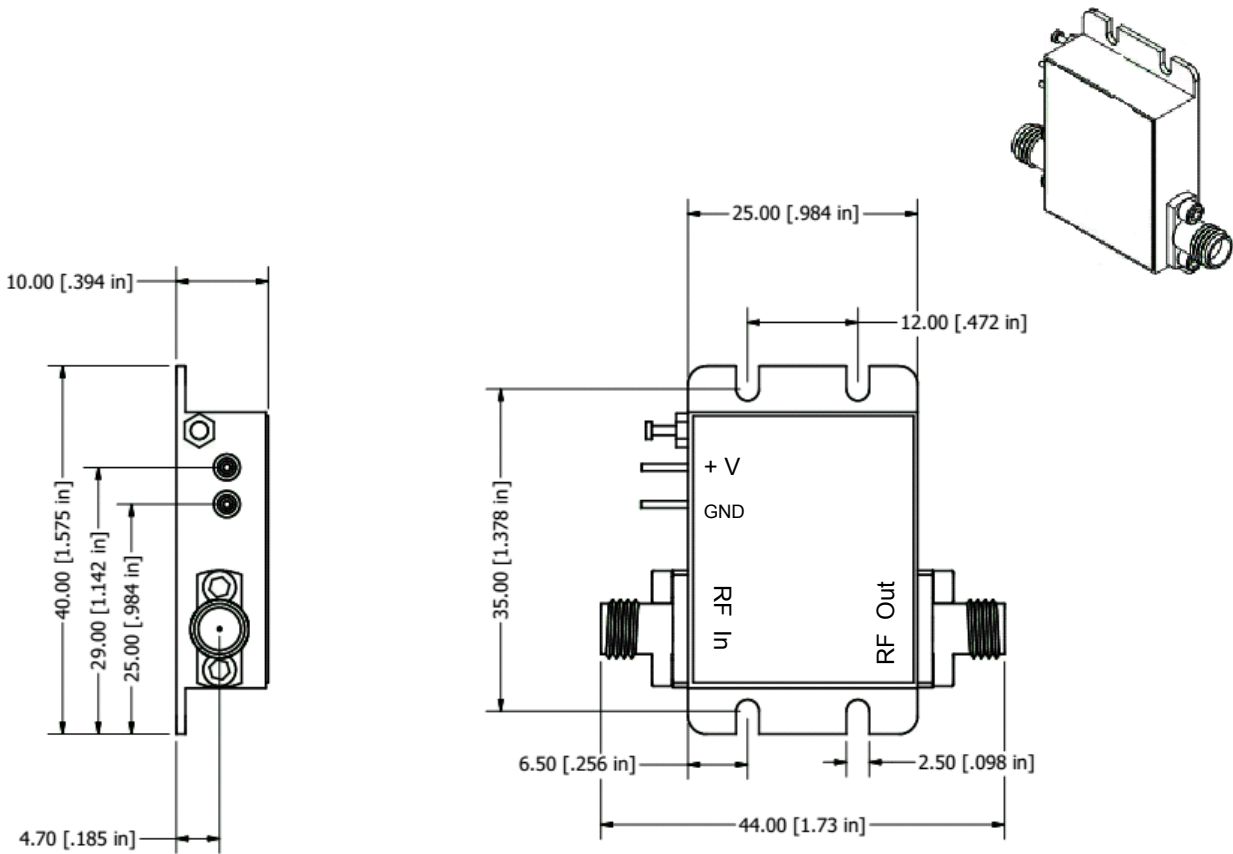

Field replaceable SMA Connectors, Removable Ground slug

Note: The unit must be attached to proper heat sink

Model Number	Description	Hermeticity	Package
AMT-A0485	SMA Female	Non-Hermetic	Outline: M020

Contact us for custom configurations and special requirements.

Our highly experienced team of engineers can quickly identify and implement innovative solutions using latest technology to improve performance and reduce cost.

- Add additional functionality: Input limiter, Temperature compensation, Amplitude/Phase matching, Amplitude/Phase Tracking, Automatic Gain control, Gain sloping, Bypass path, Specific supply voltage, Regulation, Power detector, Health status, and others
- Integrated: Filters, Switches, Limiter, Digital attenuator, Phase shifter, Microcontroller, Multiple amplifiers, Switch matrix, Comb generators and others
- Mechanical: Custom packages - Surface Mount, Connectorized, Waveguide, Carrier, Drop-in, Hermetic and others

Agile Microwave Technology Inc is the logical choice for all your commercial or military RF/Microwave components/module requirements.


Contact Information:

**701 Cascade Pointe Lane
Cary, NC 27513**

Phone: (984) 228-8001

**ISO 9001:2015
Certified Company**

info@agilemwt.com

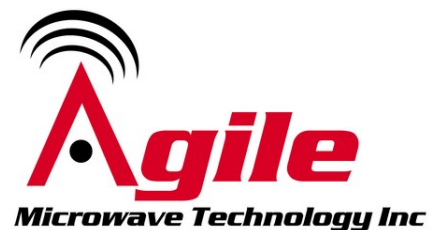

www.agilemwt.com

AMTI reserves the right to change at any time without notice the design, specifications, function/form or availability of its products described herein. The buyer/customer has the responsibility to validate the performance for their applications. No liability is assumed as result of use of this product and no patent licenses are implied. AMTI reserves all rights .