


# AMT-A0363 0.5 GHz to 8 GHz Broadband Medium Power Amplifier P1dB +28 dBm



## Data Sheet

### Features

- 0.5 GHz to 8 GHz Frequency Range usable to 10 GHz
- Typical P1dB power > +28 dBm
- Gain 30 dB Typical
- Gain Flatness  $\pm 1.5$  dB Typical
- OIP3 38 dBm typical
- Internally Regulated
- Operates from Single +15V Supply
- Unconditionally Stable
- Available in Hermetic Laser sealed version

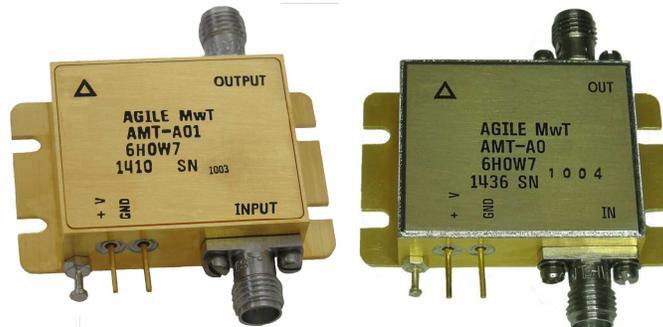

Laser Sealed Hermetic

### Description

The AMT-A0363 is a +28 dBm P1dB Broadband medium power amplifier in a compact size. The performance is achieved through the use of AMTI's proprietary matching technology and latest in GaAs technology. The amplifier I/Os are Internally matched to 50 Ohms and DC Blocked. The AMT-A0363 is ideal for use as medium power for test equipment, Communication systems or where broadband amplification and power are required without adding significant noise in a Hi-Rel communications system for Commercial or Military applications

### Applications

- Test Equipment
- Communication Systems
- EW Systems
- Lab Applications
- Radar

### MAXIMUM RATINGS<sup>1</sup>

### EAR99 NLR

Parameter	Symbol	Units	MIN	MAX
Operating Temperature – Case	T <sub>MO</sub>	° C	-40	+65
Storage Temperature - Case	T <sub>MS</sub>	° C	-40	+125
RF Input power (CW)	P <sub>in</sub>	dBm		+15
Die T <sub>Junction</sub>	T <sub>J</sub>	° C		+150
Positive Supply Voltage	V <sub>+SS</sub>	V		+15

### Appropriate Heat sink must be used

1.Stresses above those listed under "Absolute Maximum Rating" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL SPECIFICATIONS @ 23°C


Parameter	Conditions	Units	MIN	Typical	MAX
Frequency Range		GHz	0.5		8
Gain	Small Signal	dB	27	30	
Gain Flatness		dB		±1.5	±2.5
Noise Figure		dB		5	
Output Power (P1dB)		dBm	+26	+28	
OIP3	OIP3 @ 3 GHz Two tone F1-F2= 10MHz	dB		38	
RF Input Impedance	Reference to 50 ohms VSWR			1.8:1	2.3:1
RF Output Impedance	Reference to 50 ohms VSWR			1.8:1	2.3:1
Supply Voltage Positive:		V		+15	
Supply Current Positive:	Small signal	mA		470	550

Notes:

1/ Unconditional Stability

Customized configurations of the above specifications are available

## Package Outline M020: SMA Connectorized mm(inches)

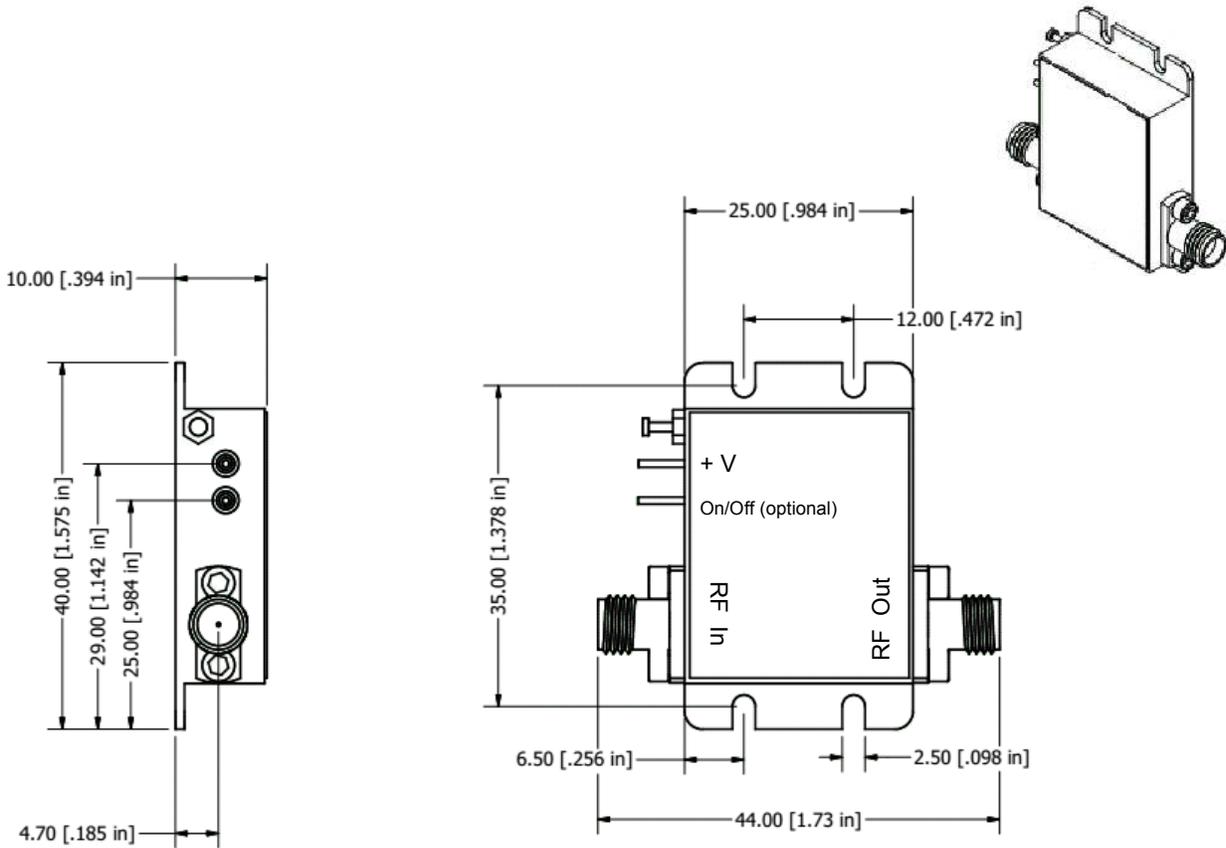

Field replaceable SMA Connectors, Removable Ground slug

**Note:** The unit must be attached to proper heat sink before turn on

Model Number	Description	Hermeticity	Package
AMT-A0363	SMA Female	Non-Hermetic	Outline: M020
AMT-A0363-H	SMA Female	Hermetic Laser Weld Tested to Leak Rate <math>2.0 \times 10^{-8}</math>	Outline: M020

Contact us for custom configurations and special requirements.

Our highly experienced team of engineers can quickly identify and implement innovative solutions using latest technology to improve performance and reduce cost.

- Add additional functionality: Input limiter, Temperature compensation, Amplitude/Phase matching, Amplitude/Phase Tracking, Automatic Gain control, Gain sloping, Bypass path, Specific supply voltage, Regulation, Power detector, Health status, and others
- Integrated: Filters, Switches, Limiter, Digital attenuator, Phase shifter, Microcontroller, Multiple amplifiers, Switch matrix, Comb generators and others
- Mechanical: Custom packages - Surface Mount, Connectorized, Waveguide, Carrier, Drop-in, Hermetic and others

Agile Microwave Technology Inc is the logical choice for all your commercial or military RF/Microwave components/module requirements.

## Contact Information:

**701 Cascade Pointe Lane  
Cary, NC 27513**

**ISO 9001:2015  
Certified Company**



**Phone: (984) 228-8001**

**[info@agilemwt.com](mailto:info@agilemwt.com)**

**[www.agilemwt.com](http://www.agilemwt.com)**

AMTI reserves the right to change at any time without notice the design, specifications, function/form or availability of its products described herein. The buyer/customer has the responsibility to validate the performance for their applications. No liability is assumed as result of use of this datasheet or product and no patent licenses are implied. AMTI reserves all rights .