


AMT-A0068 7 GHz to 9 GHz Low Noise Amplifier

Data Sheet

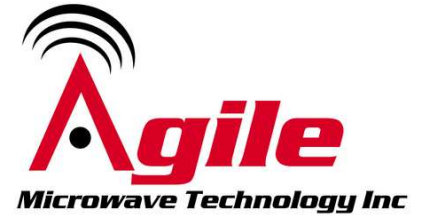

Features

- 7 GHz to 9 GHz Frequency Range
- Typical Noise Figure < 1 dB
- Typical Gain 12 dB
- Gain Flatness < ± 1 dB
- P1dB +12 dBm Typical
- Internally Regulated
- Operates from a Single Supply
- Unconditionally Stable
- State-of-the-Art GaAs Technology



Description

The AMT-A0068 is a Low Noise amplifier with very low noise figure over the full frequency range. The performance is achieved through the use of AMTI's proprietary technology. The amplifier I/Os are Internally matched to 50 Ohms. The AMT-A0068 is ideal for use as Front End of receiver system, or where amplification is required without adding excessive noise in a Hi-Rel communications system for Commercial or Military applications.

Applications

- Receiver front end,
- Radar
- Communication systems
- Microwave Radio systems
- Test Equipment

MAXIMUM RATINGS¹

Parameter	Symbol	Units	MIN	MAX
Operating Temperature – Case	T_{MO}	$^{\circ}C$	-40	+85
Storage Temperature - Case	T_{MS}	$^{\circ}C$	-55	+150
RF Input power (CW)	P_{in}	dBm		+10
Die $T_{Junction}$	T_J	$^{\circ}C$		+150
Positive Supply Voltage	V_{+SS}	V		+15

1. Stresses above those listed under "Absolute Maximum Rating" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL SPECIFICATIONS @ 23°C

Parameter	Conditions	Units	MIN	Typical	MAX
Frequency Range		GHz	7		9
Gain	Small Signal	dB	10	12	
Gain Flatness		dB		±0.8	± 1
Input Power	CW, without damage	dBm	10		
Output Power (P1dB)	1 dB compression point @ 8 GHz	dBm	10	12	
OIP3	OIP3 measured @ 8 GHz Two tone F1-F2= 10MHz	dB		20	
Noise Figure		dB		1	1.5
RF Input Impedance	Reference to 50 ohms VSWR			1.8:1	2.0:1
RF Output Impedance	Reference to 50 ohms			1:5:1	2.0:1
Supply Voltage Positive:		V		+12	
Supply Current Positive:		mA		40	


Notes:

1/ Unconditional Stability

Customized configurations of the above specifications are available

Typical Performance S-parameters and Noise Figure @ 23C


CH1 LOG 10 dB/ REF 0 dB
S11 5:-10.989 dB 9.000 000 000 GHz

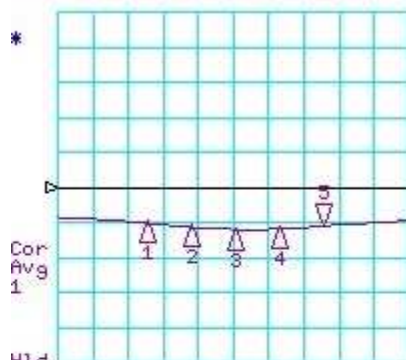

CH1 Markers
1:-10.146 dB
7.00000 GHz
2:-11.246 dB
7.50000 GHz
3:-11.949 dB
8.00000 GHz
4:-11.796 dB
8.50000 GHz

H1d
START 6000.000 MHz STOP10000.000 MHz


CH3 LOG 10 dB/ REF 0 dB
S12 5:-17.599 dB 9.000 000 000 GHz

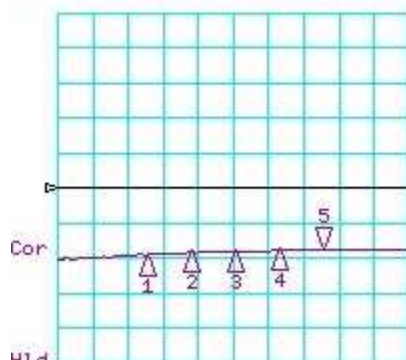

CH3 Markers
1:-19.124 dB
7.00000 GHz
2:-18.333 dB
7.50000 GHz
3:-18.049 dB
8.00000 GHz
4:-17.745 dB
8.50000 GHz

H1d
START 6000.000 MHz STOP10000.000 MHz


CH2 LOG 10 dB/ REF 0 dB
S21 5: 11.566 dB 9.000 000 000 GHz

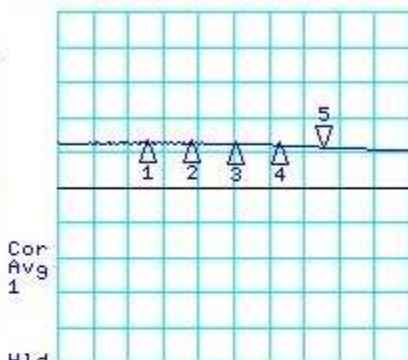

CH2 Markers
1: 12.774 dB
7.00000 GHz
2: 12.783 dB
7.50000 GHz
3: 12.432 dB
8.00000 GHz
4: 12.164 dB
8.50000 GHz

H1d
START 6000.000 MHz STOP10000.000 MHz


CH4 LOG 10 dB/ REF 0 dB
S22 5:-11.717 dB 9.000 000 000 GHz

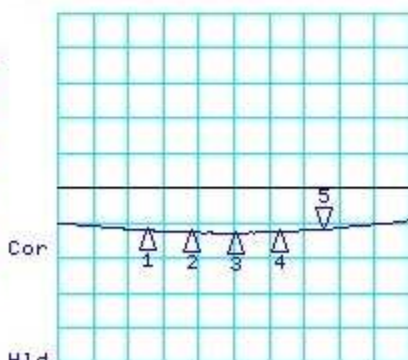


CH4 Markers
1:-11.945 dB
7.00000 GHz
2:-12.601 dB
7.50000 GHz
3:-12.672 dB
8.00000 GHz
4:-12.463 dB
8.50000 GHz

H1d
START 6000.000 MHz STOP10000.000 MHz

Agilent 22:17:15 May 23, 2013

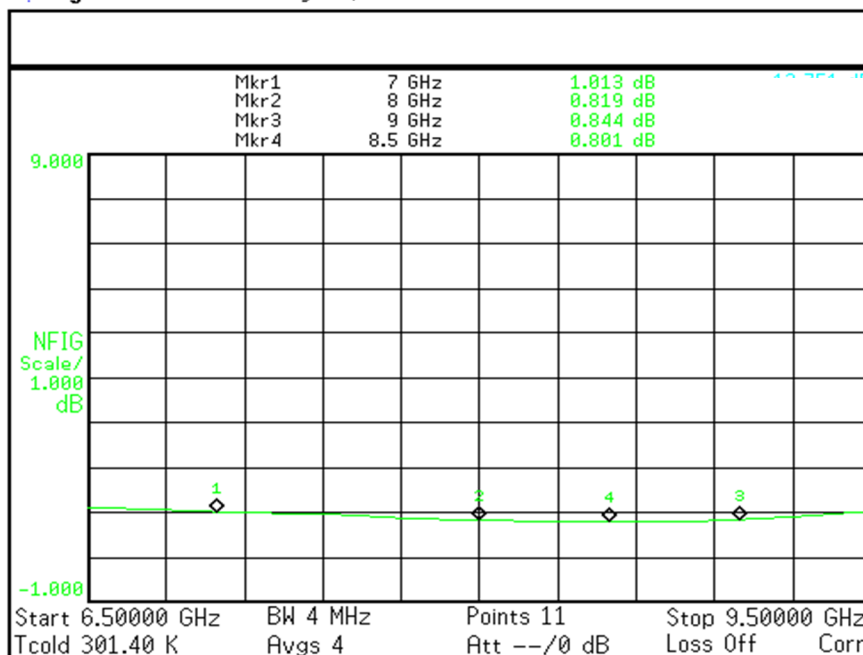

Package Outline: M088 SMA Connectorized (inches)

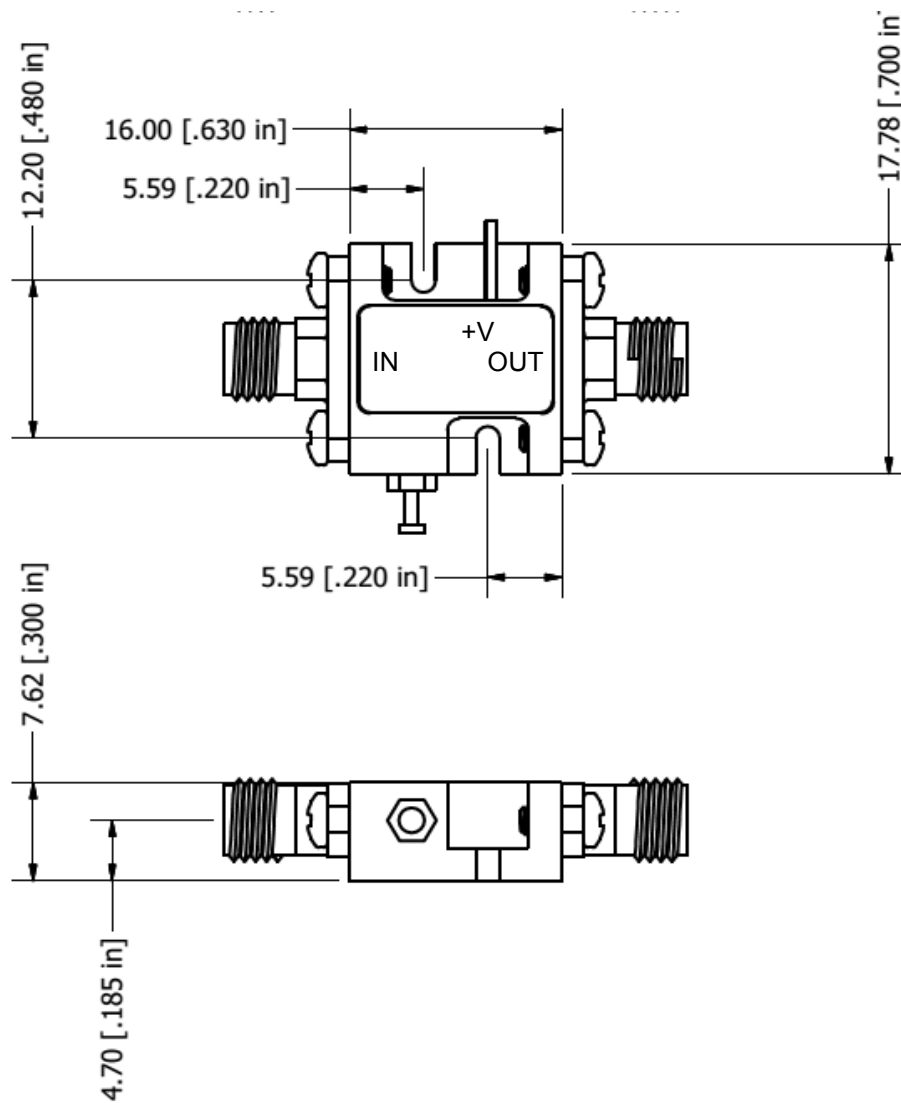

Housing: Aluminum Gold over Nickel plated
Removable SMA and Ground Slug

Model Number	Description	Hermeticity	Package
AMT-A0068	SMA Female	Non-Hermetic	Outline: M088

Contact us for custom configurations and special requirements.

Our highly experienced team of engineers can quickly identify and implement innovative solutions using latest technology to improve performance and reduce cost.


- Add additional functionality: Input limiter, Temperature compensation, Amplitude/Phase matching, Amplitude/Phase Tracking, Automatic Gain control, Gain sloping, Bypass path, Specific supply voltage, Regulation, Power detector, Health status, and others
- Integrated: Filters, Switches, Limiter, Digital attenuator, Phase shifter, Microcontroller, Multiple amplifiers, Switch matrix, Comb generators and others
- Mechanical: Custom packages - Surface Mount, Connectorized, Waveguide, Carrier, Drop-in, Hermetic and others

Agile Microwave Technology Inc is the logical choice for all your commercial or military RF/Microwave components/module requirements.

Contact Information:

**701 Cascade Pointe Lane
Cary, NC 27513**

**ISO 9001:2015
Certified Company**

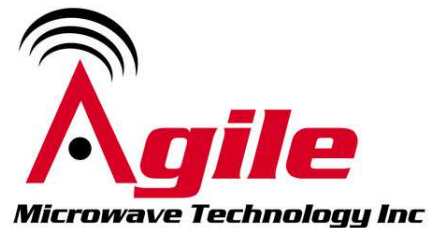

Phone: (984) 228-8001

info@agilemwt.com

www.agilemwt.com

AMTI reserves the right to change at any time without notice the design, specifications, function/form or availability of its products described herein. The buyer/customer has the responsibility to validate the performance for their applications. No liability is assumed as result of use of this product and no patent licenses are implied. AMTI reserves all rights.