


AMT-A0448 7 GHz to 12 GHz Low Noise Amplifier

Data Sheet

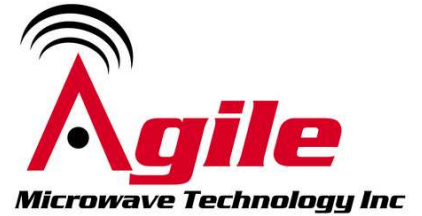

Features

- 7 GHz to 12 GHz Frequency Range
- **Typical Noise Figure 1.2 dB**
- Typical Gain 35 dB
- Gain Flatness $< \pm 1$ dB
- P1dB +15 dBm minimum
- Internally Regulated
- Operates from a Single +12V to +15V Supply
- Unconditionally Stable
- State-of-the-Art GaAs Technology



Description

The AMT-A0448-3 is a Low Noise amplifier with very low noise figure over the full frequency range. The performance is achieved through the use of AMTI's proprietary technology. The amplifier I/Os are Internally matched to 50 Ohms. The AMT-A0448-3 is ideal for use as Front End of receiver system, or where amplification is required without adding excessive noise in a Hi-Rel communications system for Commercial or Military applications.

Applications

- Receiver front end,
- Radar
- Communication systems
- Microwave Radio systems
- Test Equipment

MAXIMUM RATINGS¹

Parameter	Symbol	Units	MIN	MAX
Operating Temperature – Case	T_{MO}	° C	-40	+85
Storage Temperature - Case	T_{MS}	° C	-55	+125
RF Input power (CW)	P_{in}	dBm		+10
Die $T_{Junction}$	T_J	° C		+150
Positive Supply Voltage	V_{+SS}	V		+16

Do NOT apply DC to RF Input

1. Stresses above those listed under "Absolute Maximum Rating" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


ELECTRICAL SPECIFICATIONS @ 23°C

Parameter	Conditions	Units	MIN	Typical	MAX
Frequency Range		GHz	7		12
Gain	Small Signal	dB	30	35	
Gain Flatness		dB		±0.8	± 1
Input Power	CW, without damage	dBm	10		
Output Power (P1dB)	1 dB compression point @ 10GHz	dBm	15	16	
OIP3	OIP3 measured @ 10 GHz Two tone F1-F2= 10MHz	dB		25	
Noise Figure		dB		1.1	2
RF Input Impedance	Reference to 50 ohms VSWR			1.8:1	2:1
RF Output Impedance	Reference to 50 ohms			1:5:1	2:1
Supply Voltage Positive:		V		+12 to +15V	
Supply Current Positive:		mA		95	150

Notes:
Unconditionally stable

Customized configurations of the above specifications are available

Package Outline: M088 SMA Connectorized (inches)

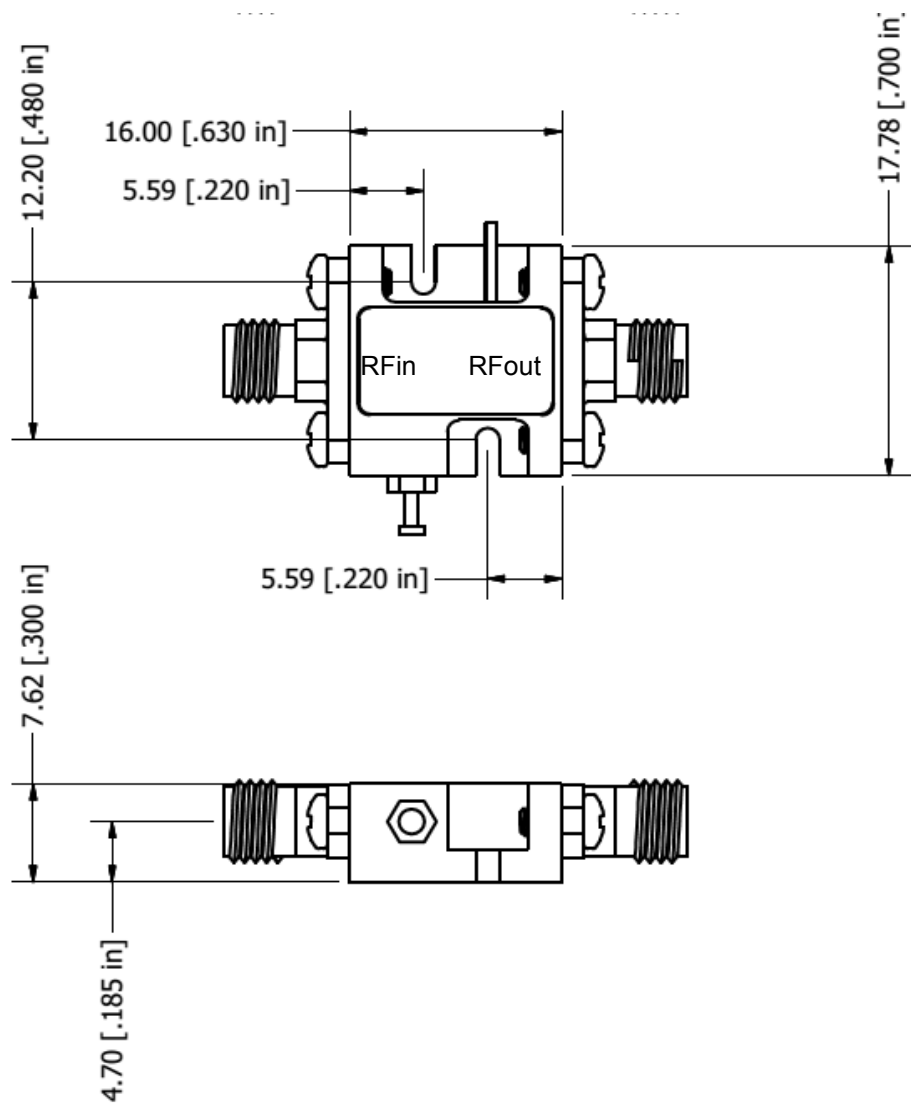

Housing: Aluminum Gold over Nickel plated
Removable SMA and Ground Slug

Model Number	Description	Hermeticity	Package
AMT-A0448	SMA Female	Non-Hermetic	Outline: M088

Contact us for custom configurations and special requirements.

Our highly experienced team of engineers can quickly identify and implement innovative solutions using latest technology to improve performance and reduce cost.

- Add additional functionality: Input limiter, Temperature compensation, Amplitude/Phase matching, Amplitude/Phase Tracking, Automatic Gain control, Gain sloping, Bypass path, Specific supply voltage, Regulation, Power detector, Health status, and others
- Integrated: Filters, Switches, Limiter, Digital attenuator, Phase shifter, Microcontroller, Multiple amplifiers, Switch matrix, Comb generators and others
- Mechanical: Custom packages - Surface Mount, Connectorized, Waveguide, Carrier, Drop-in, Hermetic and others

Agile Microwave Technology Inc is the logical choice for all your commercial or military RF/Microwave components/module requirements.


Contact Information:

**701 Cascade Pointe Lane
Cary, NC 27513**

Phone: (984) 228-8001

**ISO 9001:2015
Certified Company**

info@agilemwt.com

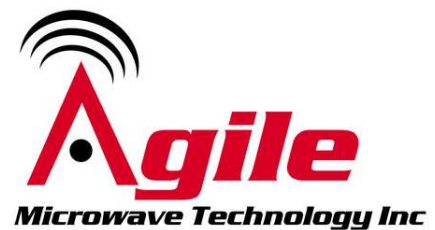

www.agilemwt.com

AMTI reserves the right to change at any time without notice the design, specifications, function/form or availability of its products described herein. The buyer/customer has the responsibility to validate the performance for their applications. No liability is assumed as result of use of this datasheet or product and no patent licenses are implied. AMTI reserves all rights.